CASE™
CANADA SECURITY

CSP-FT EX

Explosion Proof Flexible Tube

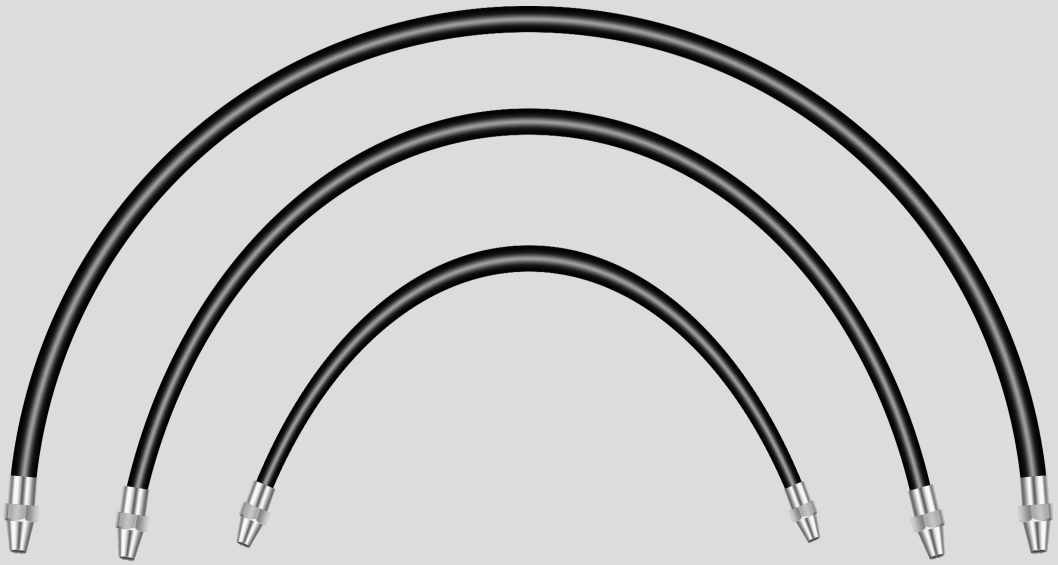

24/7 Support

KEY FEATURES

Explosion-proof flexible tube for cable threading in hazardous areas.
· Ex e IIC Gb
· IP66/68 (2m/2h)

Email: sales@canadasecurity.com
Website: canadasecurity.com
US : +1 301 900 1000
CA : +1 289 800 9000

SPECIFICATIONS

Certificate	
ATEX Certificate Mark	CE 2460 Ex II 2 G Ex eb IIC Gb Ex II 2 D Ex tb IIIC Db
Standards	*IEC/EN60079*
General	
Connector Material	*Carbon Steel or Stainless steel 304 or 316L*
Connector size	*G (NPT)， M*
IP	*IP66/68（2m/2h）*
Ambient temperature	*-40 to +80*℃
Air pressure	*80Kpa to 106Kpa*
Relative Humidity	*≤95% (no condensation)*
Length	1m, 1.5m, 2m or customer required length

DIMENSIONS (Unit: mm)

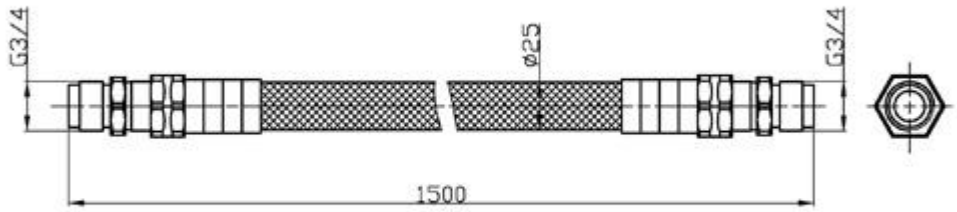

Email: sales@canadasecurity.com
Website: canadasecurity.com
US : +1 301 900 1000
CA : +1 289 800 9000